
# technical data sheet

# Cubu flex life 40, 60, 80, 100

## Core skirting for all types of flooring



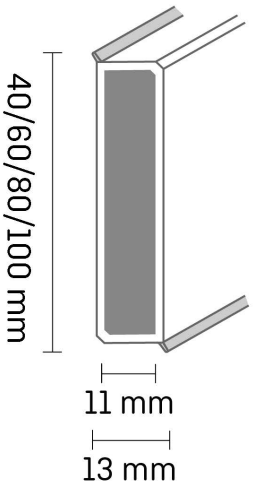


Version: 18.07.2024

Döllken Profiles

SURTECO GROUP





## Accessories



Corner blocks

**1 sales unit = 5 x 2 pieces**

**available colours:** 1013 white, 1063 silver

## installation remmendation



mitre tool



hot melt



skirting scissors



joint fill

No additional mouldings are required to form the inner and outer corners or profile ends– only the Doellken mitre tool. This tool has been specially developed for forming corners on core skirtings and with its help the fabricator can form accurate inside corners as well as seamless surrounding outside corners in a simple and efficient way. The closed surface, which is created when the outer corner is punched, additionally prevents moisture from penetrating into the profile core.

**Fixing:**
For quick, clean and secure fastening of the skirting boards, we recommend using the Doellken Profiles hot-melt adhesive system.

You can find processing videos and other helpful tips and tricks from the pros at YouTube

No additional mouldings are required to form the inner and outer corners or profile ends. The soft, flexible wall and floor lips adapt to the unevenness of the respective surface. This prevents shadow gaps and eliminates the need for reworking with silicone or acrylic.

## Advantages at a glance

- Elastic soft lips
- easy to install
- robust due to coating
- chlorine-free
- Formation of inner and outer corner as well as profile termination with the Doellken Mitre tool
- no additional mouldings necessary
- Installation with Doellken hot-melt adhesive

## Material

- HDF - core, coated with chlorine-free polyblend based on PP/TPE
- The core skirtings are made of FSC-certified wood materials, coated with polypropylene and with form-fitting applications made of TPE. These plastics are free of halogens, chlorine, plasticisers and silicones.

## Certificates

BLAUER ENGEL DAS UMWELTZEICHEN
www.blauer-engel.de/uz176

UL GREENGUARD
PRODUCT CERTIFIED FOR LOW CHEMICAL EMISSIONS UL.COM/GG UL 2818
GOLD

A+ A+ A B C

TCF totally chlorine-free

## Scope of delivery

Packaging size:
1 sales unit = 10 x 2,5 m

Packaging: Cardboard packaging sealed with adhesive tape and sales unit paper labels with article inscription.

**Storage**

Store flat, dry and protected from the weather. The profiles must be acclimatised flat in the object 24 hours before processing.

**Behaviour in fire**

**DIN EN 13501-1 KLASSE E**

**Cleaning and care**

Clean the lightly soiled surface with a damp cloth. For heavier soiling, use a commercially available household cleaning agent and observe the information in the dosage instructions of the respective manufacturer. You should avoid cleaning agents with abrasive, acidic or bleaching ingredients. Do not use abrasive household sponges. See also separate cleaning and care instructions.

**Underground**

Before fixing the skirting board, the wall must be checked for its suitability for the respective type of fixing. Substrates containing plasticisers must always be tested for adhesiveness before bonding. The same substrate tests apply as are specified for the installation of floor coverings in DIN 18365.
"Floor covering work". In this respect, the testing measures on the substrate represent the following special points of emphasis:

- evenness and angularity of the substrate
- no moisture on the substrate
- The surface of the substrate must be sufficiently firm and not porous or rough.
- no contaminated surfaces of the substrate, e.g. by oil, wax, varnish, paint residues etc.
- Suitable temperature of the substrate
- suitable room climate, no cracks in the substrate.

**Disposal**

20 01 39 Plastics Recommendation: Can be deposited together with household waste or incinerated together with household waste in compliance with the necessary technical regulations after consultation with the disposer and the competent authority.

15 01 01 Paper and cardboard packaging: Completely emptied packaging can be recycled.

## Colours

Special colours
available on request!

You can find all current colours online on our website or in the Doellken Profiles App.

Simply scan with your smartphone and check out the decors and colours:

The current version of this data sheet can be found on our website at doellkenprofiles.com.

These details and technical information have been compiled on the basis of our experience and the latest state of the art.
However, they can only be general information without any guarantee of properties, as we have no influence on the construction site conditions, the execution of the work and the processing. The relevant recommendations, guidelines and DIN regulations as well as the processing recommendations of the materials used must be observed. In case of doubt, carry out your own tests or obtain technical advice. With the publication of this product data sheet, all previous product data sheets lose their validity.

Döllken Profiles GmbH
Industriestraße 1
59199 Bönen
T: +49 3643 4170 711
F: +49 3643 4170 330
info@doellken-profiles.com
www.doellken-profiles.com
Follow us on

Version: 18.07.2024